


TECHNICAL ASSISTANCE

Flexidoor has a specialized and skilled technical team, both in the commercial and manufacturing sectors, which offers you all the necessary support from the planning to the installation phase. In this way, safety will be at your side at the time of the execution of the work.



LINTELS




REDUCED LINTEL

H = Free Passage
 H1 = Min. 180 mm
 H2 = H + 500 mm
 HM = H + 900 mm (with motor)
 H3 = H1 + 60 mm
 H4 = H1 - 70 mm


LOW LINTEL

H = Free Passage
 H1 = Min. 200 mm
 H2 = H + 500 mm
 HM = H + 900 mm (with motor)
 H3 = H1 + 60 mm
 H4 = H1 - 70 mm



NORMAL LINTEL

H = Free Passage
 H1 = Min. 300 mm
 H2 = H + 500 mm
 HM = H + 900 mm (with motor)
 H3 = H + 90 mm
 H4 = H1 - 160 mm



INCLINED LINTEL

H = Free Passage
 H1 = 300 mm (todos)
 H2 = H + 500 mm
 HM = H + 900 mm (with motor)
 H1 = 180 mm (inclinations < 8°)
 H1 = 200 mm (inclinations < 15°)




www.flexidoor.pt



Sectional Doors



Automatic Devices



High Speed Doors



Automatic Glass Doors



www.flexidoor.pt



SECTIONAL DOORS • residential

DISTRIBUTOR

Rua da Majoeira, Nº 400 • Apartado 542
 2415 - 184 Regueira de Pontes • Leiria • Portugal

Tel. +351 244 850 470

Fax. +351 244 850 471

info@flexidoor.pt • www.flexidoor.pt



Flexidoor

Flexibility, Quality, Robustness and Elegance are the characteristics that best define our doors.

Aware of market demands, Flexidoor has a range of products that can fit into any type of building. Thus, having as our goal the satisfaction of our customers, we provide products that combine quality, robustness, aesthetics and elegance.

Nowadays aesthetic appearance of our homes have a huge importance, and for this reason we provide a wide range of panel shapes and colors. This way you can always adapt the door to your own style.

Standard Range of Colors:


 Dark Grey RAL 7011	 Green similar RAL 6005 / 6009	 Beige similar RAL 1015
 Metallic Grey RAL 9007	 Red similar RAL 3000	 Blue similar RAL 5010
 Brown similar RAL 8014 / 8017	 Grey RAL 9006	 White similar RAL 9010
 Lacquered in Grey Ral 7016	 Coated in PVC light wood imitation	 Coated in PVC dark wood imitation



Composition of a Flexidoor Door

The components are of crucial importance in the operation of a door. Each accessory is subjected to rigorous tests before being selected and included in the production process, to ensure the highest quality of the product that will fulfill our customer needs. Therefore, there are multiple criteria for the selection of these accessories, of which we wish to highlight the following:

1. Silence during use
2. Durability of materials and, subsequently, of the door
3. Balancing and dimension of lintel
4. Safety against any type of hazard (Cutting, pinching, tripping)

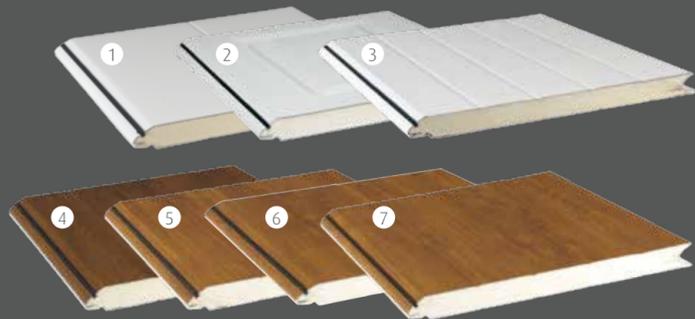

1 - White Flat 2 - Frame 3 - Groove 4 - Groove Wood Flat 5 - Groove Wood 6 - Wood Flat 7 - Groove Wood Flat



01 | Ceiling motor - PROL

A touch of class

Motor for Sectional and Up-and-Over Doors. LIKE IT is the latest innovation in home automation, with a range of solutions where high technology reigns. With different options in terms of power, the PROL delivers the performance of an motor specially developed for the residential market, with easy programming functions, quality of conception and the elegance of a top designer.

02 | Industrial Bracket

The support bracket made in galvanized steel and is adjustable in depth. This component has an finger-safe system.



07 | Lever or Embedded Handle

Flexidoor doors allow the customer to choose between two different types of handles: Lever and Embedded. The decision is based on functional factors or simply in the personal style of each customer.



03 | Spring Breakage Device

If a spring breaks, this element is automatically activated, immobilizing the door. Its use required to comply with the European Standards.



08 | Anti-Finger Catching System Hinge

The central hinge is made in galvanized steel and suits perfectly in the door panels. They have an finger-safe system that prevents finger pinching that increases the safety of our doors.



04 | Adjustable Cable Break Device

The cable break device with adjustable cable part is a component that immobilizes the door in case of a steel cable rupture.



09 | Reduced Lintel System

Optimized space between 160 to 180 mm depending of the motor's thickness guide. This system is composed by steel galvanized guides of 2 mm of thickness with fixation holes.



05 | Bottom Bracket

Adjustable bracket to allow a easier assembly of the door.



06 | Springs

Galvanized springs on residential doors, avoiding their deterioration through corrosion.



10 | Interior Latch

The interior latch is supplied to give more safety. This component allows the lock of the door and their opening is only possible from the inside.



Windows | Sun Effect



Plain effect

Squared effect

Rhombus effect

Frame: Aluminium or Pvc uv protected
Available types: Glass and acrylic



Recognised Quality

Flexidoor sectional doors fulfill all the safety requirements of the EN 13241-1:2003 standard.

