


REQUIRED INSTALLATION SETS AND TECHNICAL DIMENSIONS

- If the side wall of the opening (on the curve rail side), has a dimension greater than 700mm, the engine could be mounted in the lintel.
- If the two side walls have an dimension equal or smaller than 700mm, the engine must be mounted on the sidewall of the opening installation place.


INSTALLATION 1 / 2

LC = 150mm minimum
700mm maximum
LF = 70mm
DM = V + 500mm
DP = V + 300mm
P = 110/130mm minimum
with engine

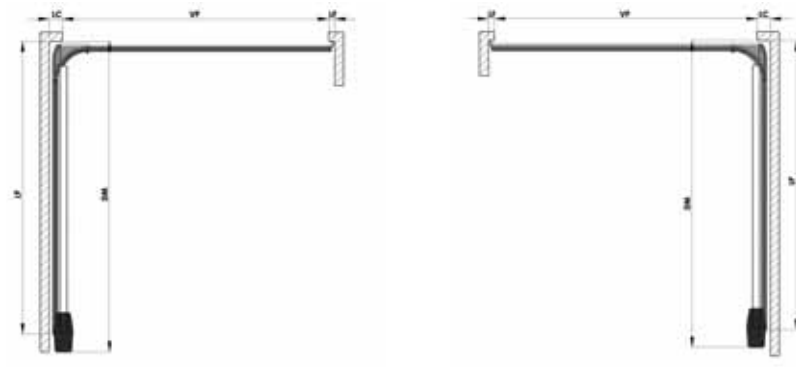


INSTALLATION 3 / 4

LC = 700mm minimum
LF = 70mm
DP = VP + 300mm
P = 110/130mm minimum
with engine

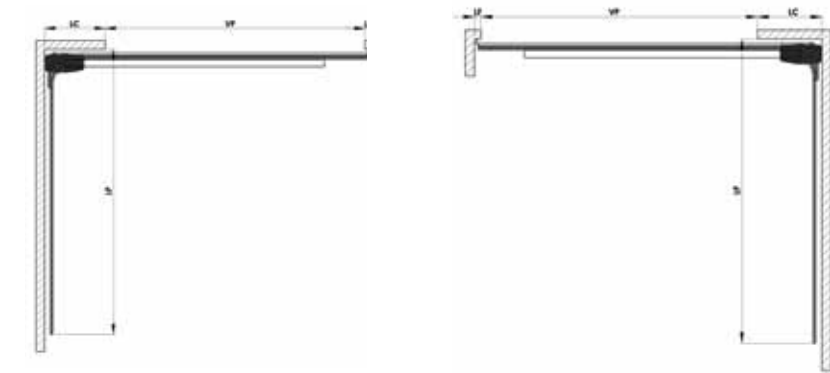

INSTALLATION 5 / 6

LC = 600mm
LF = 500mm
DP = VP + 300mm
P = 110/130mm minimum
with engine

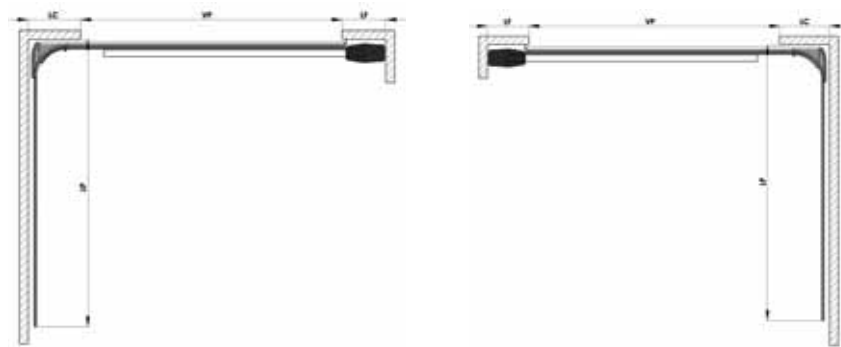


www.flexidoor.pt



Sectional Doors



Automatic Devices



High Speed Doors



Automatic Glass Doors



www.flexidoor.pt



DISTRIBUTION

Rua da Majoeira, Nº 400 • Apartado 542
2415 - 184 Regueira de Pontes • Leiria • Portugal

Tel. +351 244 850 470

Fax. +351 244 850 471

info@flexidoor.pt • www.flexidoor.pt

SIDE SLIDING SECTIONAL DOOR • residential















Slide Door

Panel in steel plate with thermoplastic paint and FingerSafe Protection System, available in a wide range of colors.




Range of Standard Colors:

 Dark Grey RAL 7011	 Green similar RAL 6005 / 6009	 Beige similar RAL 1015
 Metalic Grey RAL 9007	 Red similar RAL 3000	 Blue similar RAL 5010
 Brown similar RAL 8014 / 8017	 Grey RAL 9006	 White similar RAL 9010
 Lacquered in Grey Ral 7016	 Coated in PVC light wood imitation	 Coated in PVC dark wood imitation

REDUCE THE WASTE OF ENERGY IN FAVOR OF CONFORT AND THERMAL ISOLATION

Sandwich panel with high isolation and energy savings qualities through its 40mm thickness with injected polyurethane, CFC-free, with an average density of 43kg/m³ between the two steel plates of 0.5 mm, on which is applied a weatherseal that ensures their tightness.

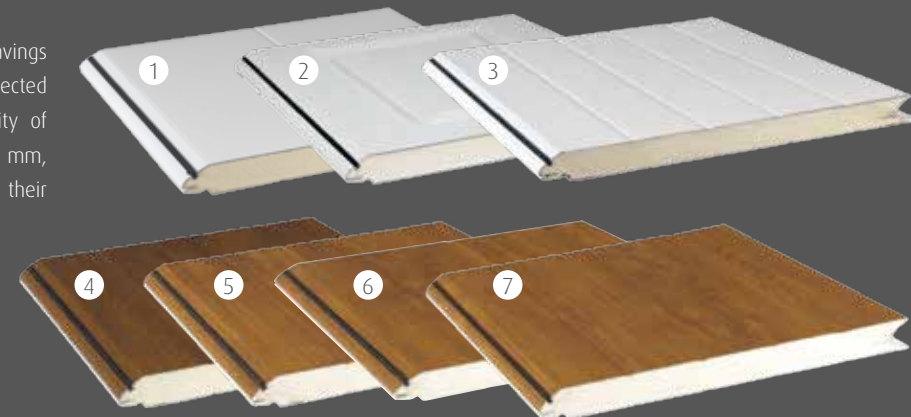

1 - White Flat 2 - Frame 3 - Groove 4 - Groove Wood Flat 5 - Groove Wood 6 - Wood Flat 7 - Groove Wood Flat



What are the advantages of a Slide Door?

Entrance completely free of obstacles even with a low lintel

01 | Superior Track in galvanized steel, roller system with double bearing rollers and integrated finger protection.



02 | Lateral profile in aluminum, on which is applied a rubber seal that assures greater tightness



04 | Pedestrian entrance due to an easy partial opening. Door can be partly opened for letting in pedestrians, eliminating the need of an Pass Door, enhancing the comfort of an passage without obstacles, which is an important attribute in daily use of your garage



03 | Inferior track in galvanized steel that guides the panel, with holes to fix it to the ground.



05 | Simplicity of functioning with sliding opening. Perfectly adaptable to any type of garage with lack of space in new or existing buildings.



06 | Manufacture to the measure needed until 5mts. of width x 2,5mts. of height.

Windows



Square window in aluminum with double glass simple



Window in PVC with double acrylate simple



Window in aluminum with double simple laminated glass



Window in aluminum with double simple laminated glass and cross insert

Recognized Quality



Flexidoor sectional doors fulfill all the safety requirements of the EN 13241-1:2003 standard.



Window in aluminum with double simple laminated glass and rhombus insert